



ENERGY RECOVERY



SILVERTOP™ RANGE

Self-regulating and high efficiency
(>90%) Energy Recovery Ventilation
Compact Unit with high performance.
Ecological solution.
Air flow from 100 to 5 500 m³/h





APPLICATION

- ▲ SILVERTOP™ range is a PLUG&PLAY and a self-regulating Energy Recovery Ventilation unit with multilingual communication, for office and industrial applications.
- ▲ Efficiency over 90 % (EN308), compliant with French RT2012 regulation and with the ErP 2009/125/EC directive.
- Air filtration, temperature control, thermal comfort.
- ▲ One-piece monobloc unit, compact, top-mounted duct connectors, plug and play and interactive (except SEASON model).

RANGE

- With 6 available models, the SILVERTOP™ range handles air flows from 100 to 5 500 m³/h.
- The SILVERTOP™ range is available in 5 different regulation programs, all available with right access in the fresh air supply way:
- SEASON:** Design for temperate climate areas, provides air renewal with high efficient energy recovery. Summer/winter operating of the counter flow heat exchanger. Adjustable air flows by potentiometer.
- FIRST:** Self-regulated unit for temperate climates, with active temperature management for optimal energy consumption and thermal comfort.
- SMART:** Idem FIRST, but equipped with a defrost electric coil which allows its use down to -20°C.
- PREMIUM:** Idem FIRST, but equipped either with a water coil (BC) or with an electric coil (BE) allowing its use down to -10°C.
- INFINITE:** Idem PREMIUM but as standard has a defrost electric coil for outdoor temperatures down to -20°C.

CONSTITUTION

- Double skin 10/10° outdoor panels.
- ▲ Insulation: 25mm high density A2-s1 (T3 and L2 class on casing airtightness as specified by EN1881) for models 06 and 08, 50mm high density M0 A1 mineral wool (T2 and L2 class on casing airtightness as specified by EN1886) for models 15, 23, 35 and 52.
- External side: RAL 7035 painted panels with a protective film.
- Internal side: Galvanized steel panels.
- ▲ Circular connectors with lip seals for airtightness guarantee (Equipped with circular branch connections with double lip seals to ensure network sealing ATEC CSTB n° 13-224-12), square connectors for model 52.
- Crimped feet integrated to the frame for handling and ground fixing.
- ▲ "EASY" technical board regroups all electrical components, potentiometer (for SEASON version) and control systems. Access by doors mounted on hinges for easy maintenance. Pad lockable switch and cable gland mounted on the top access panel.
- ▲ Top hydraulic connections (PREMIUM BC and INFINITE BC versions).
- Inclined condensate tray, easy removal.
- ▲ Condensate drain outlet on bottom of the unit.
- ▲ Filters and components access within lockable hinged doors.
- Monobloc version for all range.
- ▲ Phonic insulated panel on fresh air supply for a better acoustic comfort.

FANS


- ▲ Plug fans.
- ▲ Direct drive continuous current motors with electronic switching system (EC motors) high efficiency plug fan, with integrated thermal overload and variable speed protection. EC technology is an Ecological™ solution ensuring low energy consumption (French RT2012 regulation compliant) with management, control and regulation of the operating point (flows rate selections from 10 up to 100%). Low Noise level for a better acoustic comfort.

ENERGY EXCHANGER

- Heat efficiency, counter current static exchanger with an important aluminium plates performance, Eurovent certificated program for the AAHE.

▲ Efficiency higher than 90 % (EN 308).

- Automatic defrost in chain reaction with proportional bypass opening first (except SEASON which has an all or nothing bypass), then self-regulating defrost electrical coil for SMART and INFINITE and finally eventual supply fresh air modulated airflow (except SEASON).



FILTERS

- ▲ The SILVERTOP™ unit is standard equipped with the CLEARMOTION™ system ensuring High Indoor Air Quality and an econologic solution™ for optimal efficiency at low consumption.

- Fresh air filtration

The SILVERTOP™ unit has a double slide with a bead seal to ensure watertightness.

It is equipped as standard with a high efficiency F7 (ePm1 55%) with low pressure drop.

As an option, the SILVERTOP™ can have a double filtration stage:

M5 (ePm10 50%) to obtain a combination of M5 + F7

F9 (ePm1 80%) to obtain a device F7 + F9

- Exhaust air filtration

Standard filter: M5 (ePm10 50%)

- The filters are always mounted upstream of the components to ensure their protection.

- Mounted on slides for easy replacement with bead seal (fresh air filter) to ensure watertightness.

EQUIPMENT AND FUNCTIONNALLITY

- ▲ As standard FIRST, SMART, PREMIUM and INFINITE versions are equipped with an "EASY" regulation, with MODBUS, BACNET or WEB communication (selection on site). The EASY regulation integrates and matches the criteria of our BLUETECH™ concept, offering an optimal running of the SILVERTOP™ unit which fits all the French national (RT2012) and European (ErP) requirements and participates thanks to its efficiency to the active building management (EN15232).

▲ "EASY" regulation is integrated with an IP65 LCD display on the front panel. It's possible to add (OPTION) a touchscreen remote display with a user interface for main functions access (temperature control, reminders, errors...) and a maintenance interface giving access to the general parameters (remote distance up to 100 m).

- Internal timer ensuring dual flows operating, which are user programmable on site (except SEASON).

• Weekly and holiday period timer (except SEASON).

- ▲ Pressure controller detects dirty filter and notifies errors on display (volt free contact for SEASON). Timer function to be activated on site for planning filters replacement periods (except SEASON).

• Airflow pressure controller on each fan with errors displayed on the control panel (volt free contact for SEASON).

▲ Lockable padlock switch mounted on the top panel.

- ▲ EASY regulation (except SEASON) manages the optimal operating point and performance of the SILVERTOP™ using the integrated temperature sensors:

Outdoor air sensor

Building ambient air sensor (on exhaust outlet)

Supplied fresh air sensor

Bypass defrost sensor

Defrost coil sensor (SMART and INFINITE versions)

EASY regulation enables optimal fresh air energy input and ensures the following Ecological™ functions:

- FREE COOLING: In summer or mid-season, if the outdoor temperature is lower than the indoor temperature and the SILVERTOP™ unit (except SEASON) is operating in a cooling mode, the exchanger bypass will slowly open to an adapted position until its full opening, in order to bring free cold outdoor air inside the building. If this operation is not enough to reach the temperature setpoint, the cooling mode will be activated.

- FREE HEATING: Mainly in mid-season, if the outdoor temperature is higher than the indoor temperature and the SILVERTOP™ unit (except SEASON) is operating in a heating mode, the exchanger bypass will slowly open to an adapted position until its full opening, in order to bring free warm outdoor air inside the building. If this operation is not enough to reach the temperature setpoint, the heating mode will be activated.

Ventilation Unit DESCRIPTION SILVERTOP™

• **COLD RECOVERY:** In summer or in mid-season, if the outdoor temperature is higher than the indoor temperature and the SILVERTOP™ unit (except SEASON) is in a cooling mode, the exchanger bypass will slowly close to prevent the outdoor warm air from entering inside the building. If this operation is not enough to reach the temperature setpoint, the cooling mode will be activated. For the **SEASON** version, the cold recovery mode will start when outdoor temperature gets higher than 24°C (adjustable)

• **HEAT RECOVERY:** In winter or in mid-season, if the outdoor temperature is lower than the indoor temperature and the SILVERTOP™ unit (except **SEASON**) is in a heating mode, the exchanger bypass will slowly close to prevent the outdoor cold air from entering directly inside the building. If this operation is not enough to reach the temperature setpoint, the heating mode will be activated. For the **SEASON** version, the heat recovery mode will start when the outdoor temperature gets higher than 18°C (adjustable).

• **NIGHT COOLING:** The night cooling mode (except **SEASON**) enables to reduce the indoor building temperature depending on the last 24 hours climate conditions. Thereby between midnight and 7h (adjustable period) the night cooling function starts if the outdoor temperature is above 22°C (adjustable) during the day (between 6h and 22h). Night cooling mode is activated if the outdoor temperature is between 10 and 18°C (adjustable) and if the fresh air inlet is higher than 18°C (adjustable).

▲ Moreover, this function has a specific ventilation set point for the airflow modulation selected on the **FIRST** and **PREMIUM** versions offered by the **EASY** regulation.

• **FIRE SAFETY:** As standard, the SILVERTOP™ unit (except **SEASON**) integrates a fire safety system managing the supply and extract air fans control, following 5 modes available in the regulation parameters (function to be activated on site).

"Stop": Full Stop of the unit

"Continuous Running": Starts or keeps the unit in high speed, the fire safety function will have the priority on other alarms.

"Auto": Keeps the unit running with the settings entered on site (Stop/LS/HS).

"Supply fan only": Starts or keeps the supply air fan in high speed (exhaust off).

"Extract fan only": Starts or keeps the exhaust air fan in high speed (supply off). The SILVERTOP™ unit also has a digital input "Remote run/stop" which enables connection with a manual remote control. In this case, the external remote control has the priority on the fire security eventually activated on one of the five modes described above. Whatever mode chosen, the screen of the **EASY** regulation will show "fire security alarm" when this function is activated.

▲ 6 choices of air flow modulations for optimized energy consumption (**RT2012**, **EN15232**).

SEASON: Adjustment of each fan rotation speed by potentiometers mounted and connected in the control system board.

• For versions **FIRST**, **SMART**, **PREMIUM**, and **INFINITE**, the **EASY** regulation can control the fans in the following modes:

ECO: Fans speed adjustment through 2 airflow settings (LS-HS) in the **EASY** regulation

LOBBY™: Airflow modulation with CONSTANT PRESSURE mode, adjustable for each fan.

DIVA™: Proportional modulation of each fan airflow depending on the CO₂ rate. CO₂ sensor integrated in the exhaust air inlet.

MAC2™: Modulation in CONSTANT AIRFLOW for each fan (LS and HS) (except sizes 06 and 08). Pressure transmitters integrated inside the unit.

QUATTRO™: Proportional modulation in CONSTANT AIRFLOW for each fan depending on the CO₂ rate (except sizes 06 and 08). Pressure transmitters and CO₂ sensor (exhaust air inlet) integrated in the unit. Settings of the LS, the HS and the CO₂ minimum rate (ppm) adjustable on site directly on the **EASY** regulation.

INSTALLATION

▲ Indoor.

▲ Compact design and small footprint, top connections via double lips circular connectors (except size 52) for an easy, quick, airtight and cost-efficient installation (no adapters).

CLIMATIC VERSIONS

▲ The SILVERTOP™ unit is available in **FIRST** and **SEASON** versions for winter use down to -5°C. It is also available in **PREMIUM BC** (water heating integrated coil) and **PREMIUM BE** (electric integrated heater) offering optimal winter use down to -10°C. Lastly, its **SMART** version (electrical defrost) **INFINITE BC** (integrated electrical defrost heater and heating water coil coil) and **INFINITE BE** (integrated electrical defrost heater and electrical heating coil) is designed for an optimal winter use down to -20°C. Their functionalities are managed by the "**EASY**" regulation.

▲ Furthermore, for an optimal all seasons and all climates comfort, SILVERTOP™ unit can be connected to a water or a direct expansion cooling module (except **SEASON**) or even to a dehumidification module (**FIRST** or **SMART**): The "**EASY**" regulation integrated to the SILVERTOP™ unit enables compatible thermal modules management.

VERSIONS	INTEGRATED THERMAL BATTERY			EXTERNAL MODULE								
	DEFROST	HEATING		HEATING		COOLING		DEHUMIDIFICATION Cooling + Heating				
		Electrical	Electrical	Water	Electrical	Water	Eau	R410A	Water/Water	Water/Elec	R410A/Water	R410A/Elec
SEASON	—	—	—	—	—	—	—	—	—	—	—	—
FIRST	—	—	—	CBX-BE + CAB-CBE	CBX-BC	CBX-BF	CBX-DX	CBX-CH	CBX-CE + CAB-CBE	CBX-DXH	CBX-DXE + CAB-CBE	
SMART	✓	—	—	CBX-BE + CAB-CBE	CBX-BC	CBX-BF	CBX-DX	CBX-CH	CBX-CE + CAB-CBE	CBX-DXH	CBX-DXE + CAB-CBE	
PREMIUM BE	—	✓	—	—	—	CBX-BF	CBX-DX	—	—	—	—	
PREMIUM BC	—	—	✓	—	—	CBX-BF	CBX-DX	—	—	—	—	
INFINITE BE	✓	✓	—	—	—	CBX-BF	CBX-DX	—	—	—	—	
INFINITE BC	✓	—	✓	—	—	CBX-BF	CBX-DX	—	—	—	—	

▲ Dehumidification function (to be activated on site) associates a COMBIBOX CONCEPT™ module with both cooling and heating functions (Water or R410A) and also a heating module (Water or electrical) for **FIRST** or **SMART** version, to the SILVERTOP™.

In this case, the regulation will automatically manage heating and cooling needed

supply for dehumidification while providing the optimum temperature to the building. During cooling demand, building temperature management has the priority over dehumidification.




SILVERTOP® Model	Electrical motor power (W)	Temp. Use (°C / °C)	Electrical safety rating	Thermic protection*	SEASON & FIRST & PREMIUM BC		INFINITE BC & SMART		PREMIUM BE		INFINITE BE	
					Electrical supply voltage (V / Ph / Hz)	Electric charge protection (A)						
06	2 x 169 W	-20 / 60	IP54 / B	PTI	230 / 1 / 50	3,4	230 / 1 / 50	8,8	230 / 1 / 50	8,8	230 / 1 / 50	14,2
08	2 x 170 W	-20 / 60	IP54 / B	PTI	230 / 1 / 50	4,0	230 / 1 / 50	14,8	230 / 1 / 50	14,8	230 / 1 / 50	25,7
15	2 x 480 W	-20 / 40	IP54 / B	PTI	230 / 1 / 50	4,9	400 / 3+N / 50	9,7	230 / 1 / 50	21,2	400 / 3+N / 50	15,1
23	2 x 750 W	-20 / 40	IP54 / B	PTI	230 / 1 / 50	7,2	400 / 3+N / 50	13,0	400 / 3+N / 50	13,0	400 / 3+N / 50	22,8
35	2 x 1000 W	-20 / 50	IP54 / B	PTI	400 / 3+N / 50	3,8	400 / 3+N / 50	21,2	400 / 3+N / 50	19,0	400 / 3+N / 50	36,3
52	2 x 1700 W	-20 / 40	IP54 / B	PTI	400 / 3+N / 50	5,8	400 / 3+N / 50	27,4	400 / 3+N / 50	23,1	400 / 3+N / 50	44,7

* PTI : Included Thermic Protection


DIMENSION CARACTERISTICS

SILVERTOP™


SILVERTOP® 06 à 23

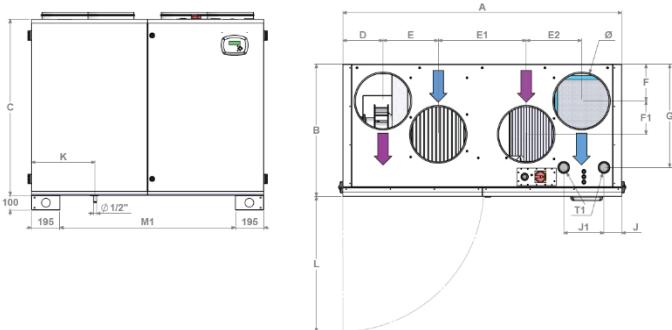

SILVERTOP® 35

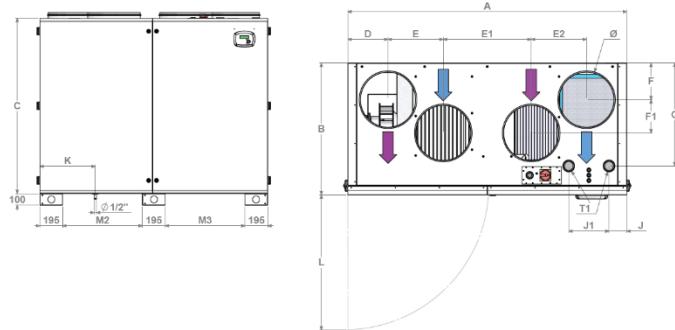


SILVERTOP® 52

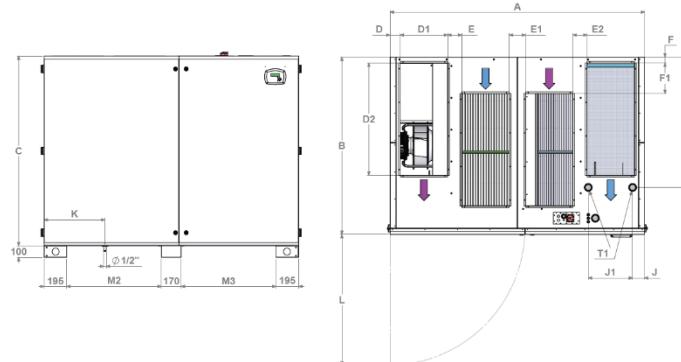

SILVERTOP® Models	Ø	A	B	C	D	D1	D2	E	E1	E2	F	F1	G	J	J1	K	L	M1	M2	M3	T1	SEASON	PREMIUM BE	INFINITE BE
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	inch	kg	kg	kg	
06	200	1105	570	1040	145	—	—	225	365	225	135	150	385	75	130	265	545	720	—	—	1/2"	175	180	185
08	250	1265	700	1150	170	—	—	235	415	270	160	225	485	75	180	275	625	880	—	—	1/2"	250	255	260
15	315	1590	750	1200	230	—	—	315	500	315	210	190	585	100	230	435	770	1200	—	—	1/2"	320	330	335
23	400	1735	1065	1340	270	—	—	330	535	330	250	420	755	100	230	440	855	1350	—	—	1/2"	490	500	510
35	450	1950	1210	1495	295	—	—	340	615	405	280	515	805	100	305	475	960	—	685	685	1/2"	635	650	660
52	—	2185	1520	1625	85	405	960	120	140	120	50	260	1115	100	380	525	1120	—	810	810	1"	875	890	905


G - J - J1 - T1 for Water Coils coil (PREMIUM BC / INFINITE BC)

(T1= Gas threaded steel pipe diameter)

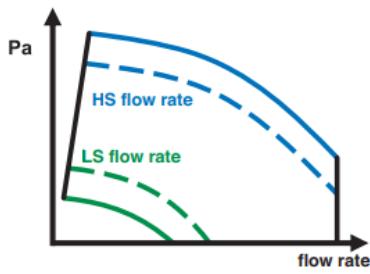


SILVERTOP™ ECO Operating

Selection of 1 or 2 different airflows (LS/HS) per fan. Except for SEASON, 1 airflow adjustable with potentiometer

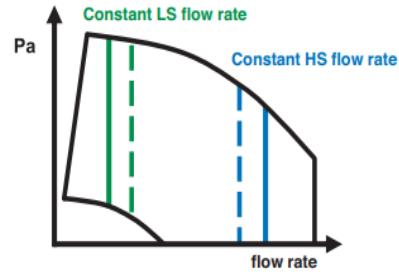


SILVERTOP™ + MAC2 Operating

Selection of 1 or 2 CONSTANT airflows per fan, except for SILVERTOP™ 06 and 08.

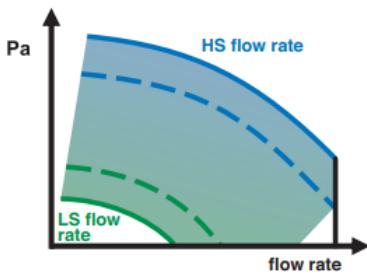


SILVERTOP™ + DIVA™ Operating

PROPORTIONAL ventilation between two airflows (LS/HS) per fan.

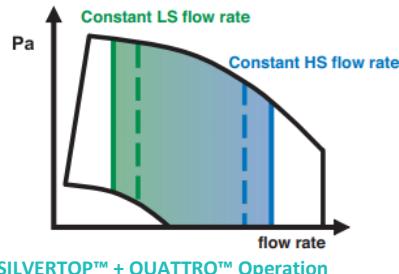

SILVERTOP™ + QUATTRO™ Operation

PROPORTIONAL ventilation between two CONSTANT airflows per fan. Except for SILVERTOP™ 06 and 08.

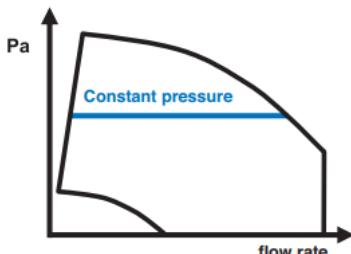

SILVERTOP™ + LOBBY™ Operating

CONSTANT PRESSURE ventilation per fan



ED-TOUCH LCD display
(no compatible with SEASON version)
With user display and maintenance interface
(up to 100 m)



ECONOLOGICAL SOLUTIONS®



- The Lp4m dB(A) curves correspond to the level of acoustic pressure at 4m in a hemispherical free field on a reflective plane, the "supply air inlet" and "exhaust air discharge" sides not connected, the "supply air outlet" and "exhaust air suction" connected.
- To achieve the overall acoustic pressure Lp dB(A), at a certain distance, add the values below to Lp4m.

Distance (m)	1,5	3	4	5	7	10
Distance weighting dB(A)	9	3	0	-2	-5	-8

Tolerances : Global values +/- 3 dB(A)
Acoustic Spectrum +/- 5 dB(A)

- The curves for "Lw cond supply air outlet dB(A)" correspond to the overall acoustic power emitted on the "supply air outlet" side or "exhaust air discharge".
- To achieve the range of acoustic power Lw cond supply air outlet dB(A), on the "supply air outlet" or "exhaust air discharge", add the below values to the acoustic power "Lw cond supply air outlet" displayed on the curves.


Downstream acoustic spectrum weighting function "Lw cond air outlet dB(A)" displayed on the curves								
Frequency	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz
SILVERTOP 06 weighting dB(A)	-23	-14	-10	-6	-6	-8	-12	-12
SILVERTOP 08 weighting dB(A)	-18	-9	-5	-5	-8	-13	-18	-23
SILVERTOP 15 weighting dB(A)	-21	-11	-6	-8	-6	-9	-14	-19
SILVERTOP 23 weighting dB(A)	-20	-15	-9	-8	-6	-6	-12	-16
SILVERTOP 35 weighting dB(A)	-24	-15	-11	-9	-4	-7	-11	-15
SILVERTOP 52 weighting dB(A)	-26	-17	-11	-7	-4	-7	-12	-15

- The curves for "Lw cond exhaust air suction dB(A)" correspond to the overall acoustic power emitted on the duct sides "exhaust air suction" and "supply air inlet".
- To achieve the range of acoustic power Lw cond exhaust air suction dB(A), on the "exhaust air suction" and "supply air inlet" sides, add the values below to the acoustic power "exhaust air suction" displayed on the curves.

Upstream acoustic spectrum weighting function "Lw cond exhaust air suction dB(A)" displayed on the curves								
Frequency	63 Hz	125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz
SILVERTOP 06 weighting dB(A)	-32	-23	-13	-6	-5	-6	-12	-15
SILVERTOP 08 weighting dB(A)	-28	-17	-7	-6	-5	-8	-16	-25
SILVERTOP 15 weighting dB(A)	-20	-14	-7	-6	-6	-8	-14	-22
SILVERTOP 23 weighting dB(A)	-24	-18	-8	-6	-6	-8	-12	-18
SILVERTOP 35 weighting dB(A)	-25	-16	-8	-6	-8	-6	-12	-17
SILVERTOP 52 weighting dB(A)	-25	-17	-7	-5	-8	-6	-12	-17

- To achieve the acoustic pressure NSC4 dB(A) (noise level at 4m in a hemispherical free field, with the device placed on the ground on a reflective plane, with HRV terminals connected to the intake and discharge with ducts having same level of sound insulation), add following values to Lp4m value displayed on the curves.

Acoustic weighting for NSC4 dB(A) achievement depending on Lp4m displayed on the curve					
SILVERTOP 06	SILVERTOP 08	SILVERTOP 15	SILVERTOP 23	SILVERTOP 35	SILVERTOP 52
-17	-17	-18	-20	-20	-20

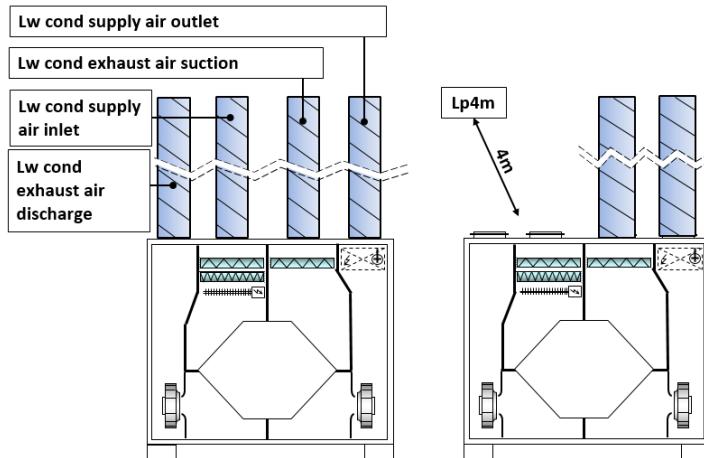

Performance Labelling
Products with this label do respect Uniclima's recommendation for performances labelling.

NOTA : Curves are issued from measurements, on the fresh air, made with all ducts connected (configuration D description from EN 13141-4).

GENERAL CHARACTERISTICS SILVERTOP™

EQUIPEMENTS	SEASON	FIRST	SMART	PREMIUM BE	PREMIUM BC	INFINITE BE	INFINITE BC
Low energy consumption EC Fan motors	●	●	●	●	●	●	●
Opacimetric F7, fresh air filter	●	●	●	●	●	●	●
Gravimetric G4, exhaust air filter	●	●	●	●	●	●	●
High efficiency plate counterflow exchanger (>90%) EUROVENT certified	●	●	●	●	●	●	●
Internal 100% Bypass	●	●	●	●	●	●	●
Removable inclined condensate trays below plate counterflow exchanger	●	●	●	●	●	●	●
RAL7035 double skin panels 50 mm insulation (except 06 & 08 : 25mm)	●	●	●	●	●	●	●
Circular branch connectors with double lip seal (ATEC CSTB n°13-224-12), except 52, square connectors	●	●	●	●	●	●	●
IP65 LCD display included on the front panel	—	●	●	●	●	●	●
MODBUS or BACNET in RS485 or TCP/IP or WEB (selection on menu) communicating regulation	—	●	●	●	●	●	●
Fans speed control (LS - HS) with EASY regulation	—	●	●	●	●	●	●
Fan rotation speed control through potentiometer	●	—	—	—	—	—	—
Supply temperature sensor	—	●	●	●	●	●	●
Exhaust temperature sensor	—	●	●	●	●	●	●
Outdoors temperature sensor	●	●	●	●	●	●	●
Bypass defrost temperature sensor	—	●	●	●	●	●	●
Defrost battery sensor	—	—	●	—	—	●	●
Antifreezing thermostat on heating battery	—	—	—	—	●	—	●
Defrost electric battery thermostat	—	—	●	—	—	●	●
Heating Electric battery thermostat	—	—	—	●	—	●	—
Lockable proximity switch	●	●	●	●	●	●	●
Power cord grommet	●	●	●	●	●	●	●
FUNCTIONS	SEASON	FIRST	SMART	PREMIUM BE	PREMIUM BC	INFINITE BE	INFINITE BC
Defrost through bypass	●	—	—	—	—	—	—
Cascade defrost : bypass + battery(SMART/INFINITE) + fresh air airflow modulation	—	●	●	●	●	●	●
Self-regulating electric defrost battery	—	—	●	—	—	●	●
Self regulating heating battery	—	—	—	●	—	●	—
Self regulating water coils battery	—	—	—	—	●	—	●
Internal 100%, All or Nothing, Automatic management Summer/Winter	●	—	—	—	—	—	—
Internal 100% bypass, self-regulating and modulating (0-100%)	—	●	●	●	●	●	●
Free-Cooling optimal management	—	●	●	●	●	●	●
Free-Heating optimal management	—	●	●	●	●	●	●
Night-Cooling management (night boost ventilation)	—	●	●	●	●	●	●
Optimum cooling recovery management	—	●	●	●	●	●	●
Thermostatic cooling recovery management	●	—	—	—	—	—	—
Optimum heat recovery management	—	●	●	●	●	●	●
Thermostatic heat recovery management	●	—	—	—	—	—	—
Supply temperature management (Air law)	—	●	●	●	●	●	●
Building temperature management (exhaust)	—	●	●	●	●	●	●
Weekly timer	—	●	●	●	●	●	●
Holidays and bank holidays timer	—	●	●	●	●	●	●
Fresh air pressure switch	●	●	●	●	●	●	●
Airflow control pressure switch (exhaust and supply)	●	●	●	●	●	●	●
Fire security with 5 available modes	—	●	●	●	●	●	●
Heating management module (electric or water) COMBIBOX CONCEPT®	—	●	●	—	—	—	—
Cooling management module (water or R410A) COMBIBOX CONCEPT®	—	●	●	●	●	●	●
Dehumidification module COMBIBOX CONCEPT®	—	●	—	—	—	—	—
FACTORY MOUNTED OPTIONS	SEASON	FIRST	SMART	PREMIUM BE	PREMIUM BC	INFINITE BE	INFINITE BC
LOBBY® : airflow modulation with CONSTANT PRESSURE	—	○	○	○	○	○	○
DIVA® : proportional airflow modulation based on CO ₂	—	○	○	○	○	○	○
MAC2® : airflow modulation at CONSTANT AIRFLOW (except SILVERTOP 06 and 08)	—	○	○	○	○	○	○
QUATTRO® : proportional airflow modulation base on CO ₂ between 2 CONSTANT AIRFLOWS (except SILVERTOP 06 and 08)	—	○	○	○	○	○	○
OPTIONAL EQUIPMENT (Supplied unassembled)	SEASON	FIRST	SMART	PREMIUM BE	PREMIUM BC	INFINITE BE	INFINITE BC
Cooling module (water or R410A) COMBIBOX CONCEPT®	—	◊	◊	◊	◊	◊	◊
Heating module (electric or water) COMBIBOX CONCEPT®	—	◊	◊	—	—	—	—
Dehumidification module COMBIBOX CONCEPT®	—	◊	◊	—	—	—	—
Changeover pad for heating/cooling switch on changeover battery (Supplementary module)	—	◊	◊	—	—	—	—
Touchscreen remote control (up to 100 m)	—	◊	◊	◊	◊	◊	◊
Ambient Temperature management via LCD remote control	—	◊	◊	◊	◊	◊	◊
WONDERROOM, area airflow and temperature management with self-communication with the SILVERTOP®	—	◊	◊	◊	◊	◊	◊
Exhaust filter pressure switch	◊	◊	◊	◊	◊	◊	◊
Fresh air prefilter, gravimetric or opacimetric (G4 or M5)	◊	◊	◊	◊	◊	◊	◊
Fresh air filter, opacimetric F9	◊	◊	◊	◊	◊	◊	◊
Exhaust filter, opacimetric M5	◊	◊	◊	◊	◊	◊	◊







● : Standard equipment or function

○ : Optional equipment or function. Factory cabled and mounted.

◊ : Optional equipment or function. Supplied unassembled



SILVERTOP® 06

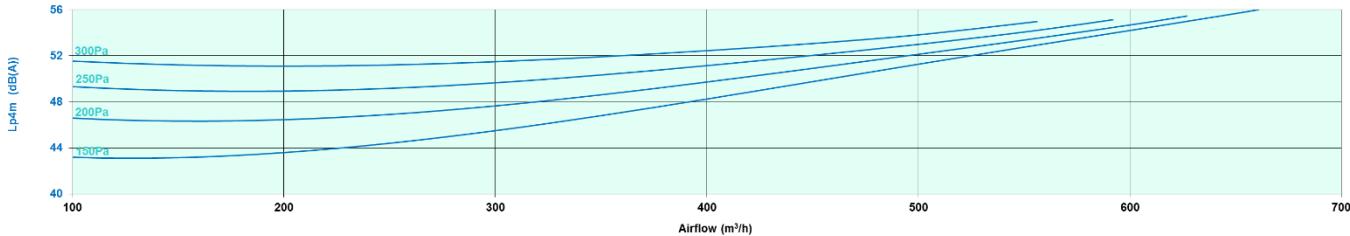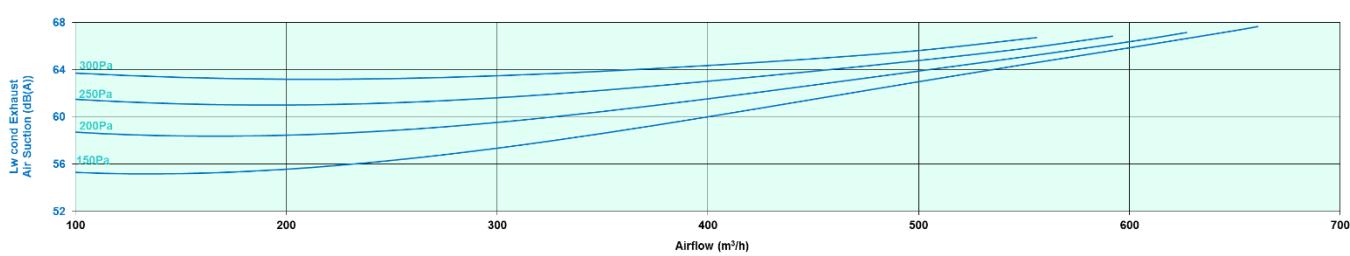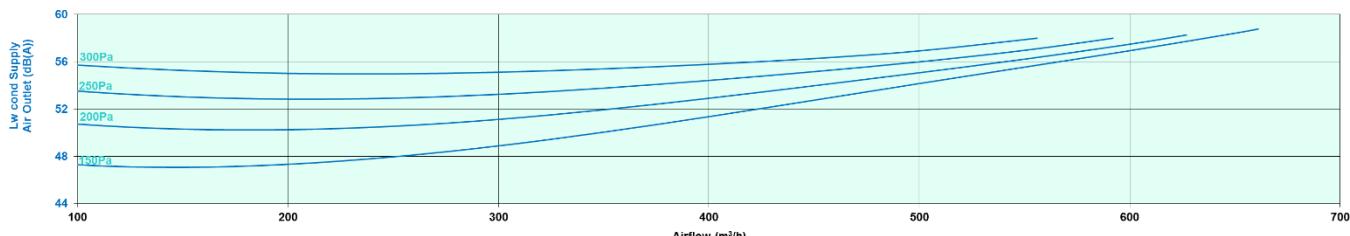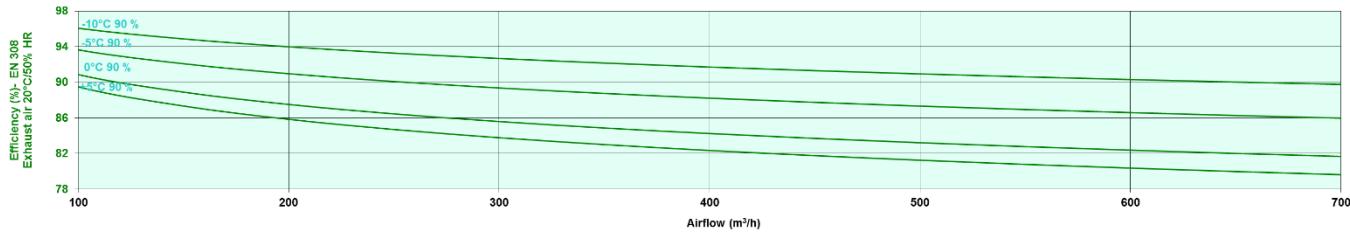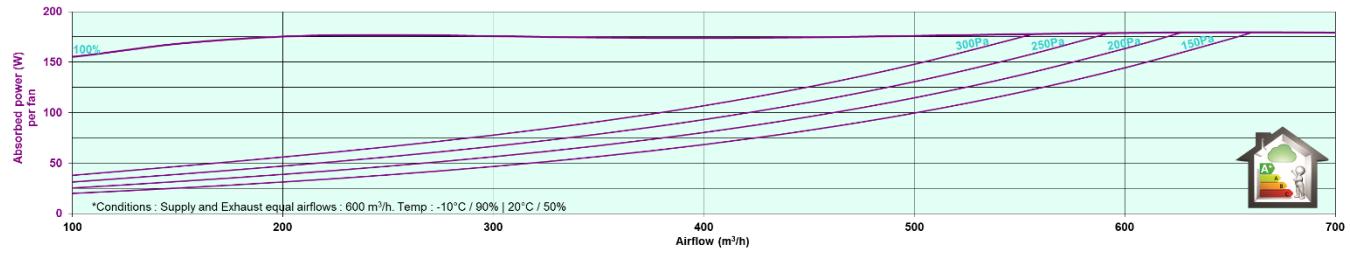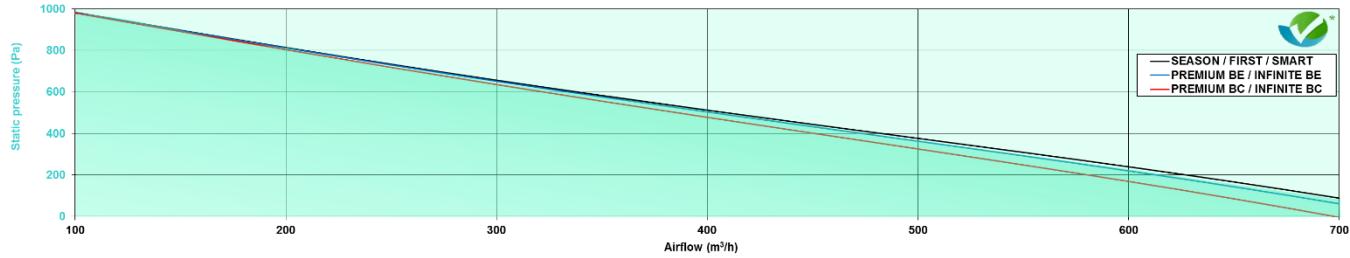

For your projects with CONSTANT PRESSURE modulation, think of our WONDERROOM™ areas (max 31) airflow modulator, it will ensure optimal thermal comfort while minimizing energy consumption.

SILVERTOP® 06

Heating water coil battery - PREMIUM / INFINITE BC

Water Temp. [°C/°C]	Air inlet Temp. [°C]	Airflow [m³/h]	100	200	300	400	500	600
			100	200	300	400	500	600
80 / 60	11	Power [kW]/Air outlet Temp. [°C]	1,6 / 56,7	2,6 / 48,7	3,4 / 43,9	4,0 / 40,5	4,6 / 38,0	5,1 / 36,0
		Water flow [l/h]/DP water [kPa]	69 / 1,3	113 / 3,2	148 / 5,2	177 / 7,3	202 / 9,2	225 / 11,2
	15	Power [kW]/Air outlet Temp. [°C]	1,5 / 57,6	2,4 / 50,0	3,1 / 45,6	3,8 / 42,4	4,3 / 40,1	4,8 / 38,2
		Water flow [l/h]/DP water [kPa]	64 / 1,2	105 / 2,8	137 / 4,6	164 / 6,4	188 / 8,1	209 / 9,8
60 / 50	11	Power [kW]/Air outlet Temp. [°C]	1,2 / 45,0	1,9 / 39,2	2,5 / 35,7	3,0 / 33,3	3,5 / 31,4	3,9 / 29,9
		Water flow [l/h]/DP water [kPa]	101 / 2,8	168 / 6,9	220 / 11,4	265 / 15,8	303 / 20,2	337 / 24,5
	15	Power [kW]/Air outlet Temp. [°C]	1,1 / 45,9	1,8 / 40,6	2,3 / 37,4	2,8 / 35,2	3,2 / 33,5	3,5 / 32,1
		Water flow [l/h]/DP water [kPa]	92 / 2,3	152 / 5,8	200 / 9,5	240 / 13,2	275 / 16,9	306 / 20,5
45 / 40	11	Power [kW]/Air outlet Temp. [°C]	0,8 / 35,2	1,4 / 31,2	1,8 / 28,8	2,2 / 27,0	2,5 / 25,7	2,8 / 24,7
		Water flow [l/h]/DP water [kPa]	143 / 5,4	239 / 13,7	315 / 22,6	379 / 31,7	435 / 40,6	485 / 49,4
	15	Power [kW]/Air outlet Temp. [°C]	0,7 / 36,1	1,2 / 32,6	1,6 / 30,5	1,9 / 21,3	2,2 / 27,8	2,4 / 26,9
		Water flow [l/h]/DP water [kPa]	125 / 4,3	208 / 10,7	274 / 17,6	330 / 24,6	378 / 31,5	421 / 38,3

Electrical battery - SMART / PREMIUM / INFINITE BE

Fresh Air Airflow (m³/h)	0°C 600	-5°C 600	-10°C 600	-15°C 600	-15°C* 600	0°C 600	-5°C 600	-10°C 600	-10°C* 600	-10°C 600	-15°C 600	-15°C* 600
Version	FIRST-SEASON		SMART			PREMIUM BE			INFINITE BE			
Power (kW)			Defrost battery			Heating battery			Heating + Defrost batteries			
Unit outlet Temp. (°C)	16,5	16,2	16,6	13,5	18,2	22,7	22,4	18,6	25,7	22,8	19,7	26,1

Those datas result from optimum regulation configuration considering outdoor temperatures.







Permanent unit supplied temperature, taking in account proportional bypass opening for exchanger defrost.

* 20% Airflow decrease on FRESH AIR SUPPLY (As standard function)

For your external cooling batteries (water or R410A), use our selection software **SOFTWAIR™** and get the right selection with its detailed report.



SILVERTOP® 08

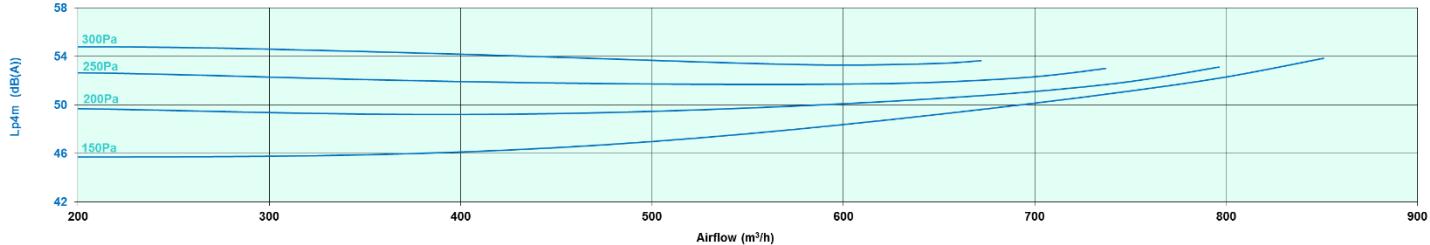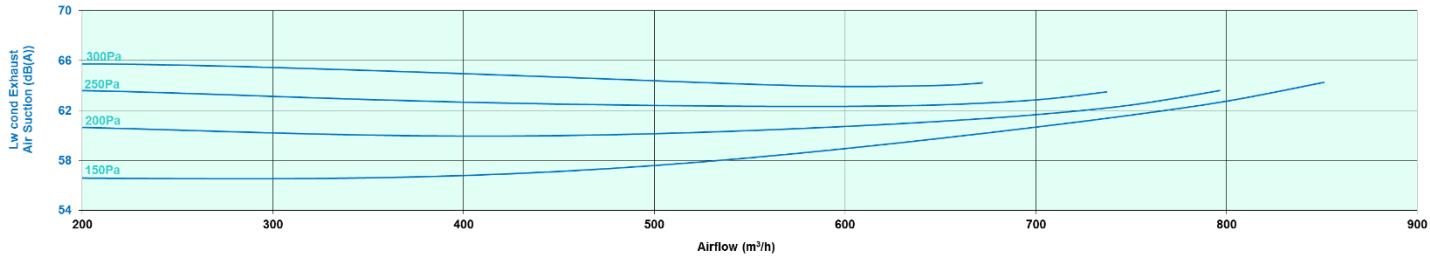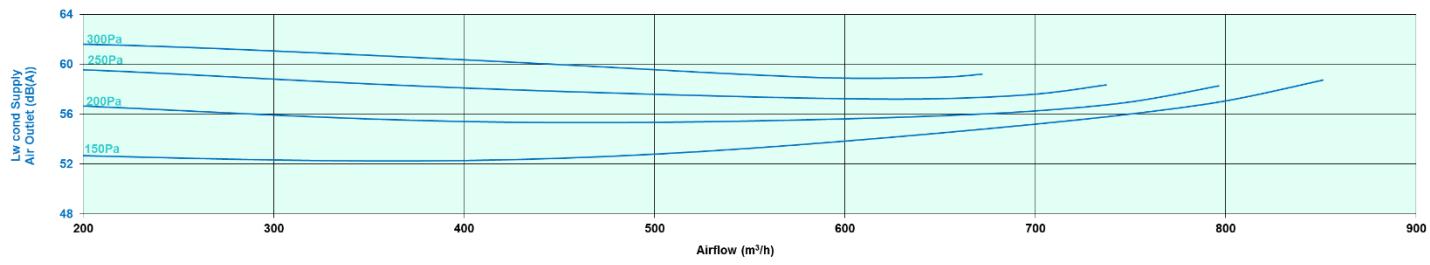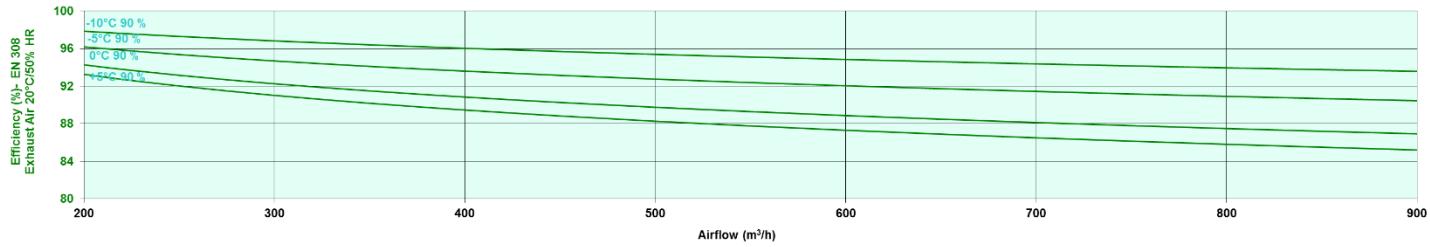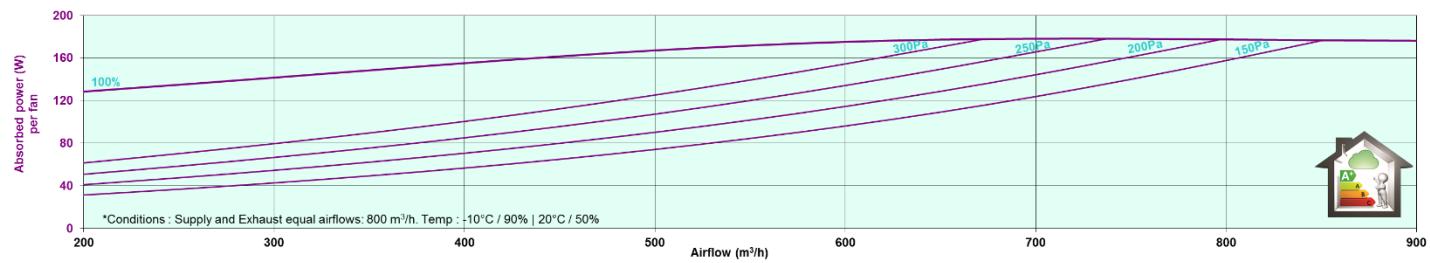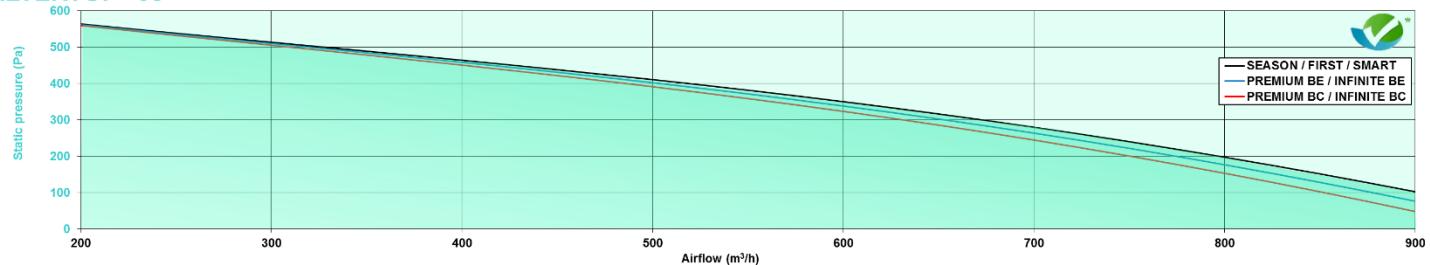

SILVERTOP® 08

Heating water coil battery - PREMIUM / INFINITE BC

Water Temp. [°C/°C]	Air inlet Temp. [°C]	Airflow [m³/h]	200	300	400	500	600	700	800
80 / 60	11	Power [kW]/Air outlet Temp. [°C]	3,0 / 54,8	4,0 / 50,0	4,9 / 46,7	5,6 / 44,0	6,3 / 41,9	7,0 / 40,1	7,6 / 38,6
		Water flow [l/h]/DP water [kPa]	131 / 1,0	175 / 1,6	214 / 2,3	247 / 3,0	278 / 3,8	306 / 4,5	331 / 5,2
	15	Power [kW]/Air outlet Temp. [°C]	2,8 / 55,7	3,7 / 51,3	4,5 / 48,2	5,2 / 45,7	5,9 / 43,7	6,5 / 42,1	7,0 / 40,7
		Water flow [l/h]/DP water [kPa]	122 / 0,8	163 / 1,4	199 / 2,0	230 / 2,7	258 / 3,3	284 / 3,9	307 / 4,5
60 / 50	11	Power [kW]/Air outlet Temp. [°C]	2,2 / 43,6	3,0 / 40,3	3,7 / 37,8	4,3 / 35,9	4,8 / 34,3	5,3 / 33,0	5,7 / 31,9
		Water flow [l/h]/DP water [kPa]	194 / 2,1	261 / 3,5	319 / 5,1	370 / 6,6	416 / 8,2	459 / 9,8	498 / 11,4
	15	Power [kW]/Air outlet Temp. [°C]	2,0 / 44,6	2,7 / 41,5	3,3 / 39,3	3,9 / 37,6	4,3 / 36,1	4,8 / 35,0	5,2 / 33,9
		Water flow [l/h]/DP water [kPa]	176 / 1,7	237 / 2,9	289 / 4,2	335 / 5,5	377 / 6,9	415 / 8,2	450 / 9,5
45 / 40	11	Power [kW]/Air outlet Temp. [°C]	1,6 / 34,3	2,2 / 32,0	2,6 / 30,3	3,1 / 28,9	3,5 / 27,8	3,8 / 26,9	4,1 / 26,1
		Water flow [l/h]/DP water [kPa]	276 / 4,1	372 / 7,0	456 / 10,1	530 / 13,3	597 / 16,5	659 / 19,8	715 / 23,0
	15	Power [kW]/Air outlet Temp. [°C]	1,4 / 35,3	1,9 / 33,3	2,3 / 31,8	2,7 / 30,6	3,0 / 29,6	3,3 / 28,8	3,6 / 28,1
		Water flow [l/h]/DP water [kPa]	240 / 3,2	324 / 5,4	397 / 7,8	461 / 10,3	519 / 12,8	572 / 15,3	621 / 17,8

Electrical battery - SMART / PREMIUM / INFINITE BE

Fresh Air Airflow (m³/h)	0°C 800	-5°C 800	-10°C 800	-15°C 800	-15°C* 800	0°C 800	-5°C 800	-10°C 800	-10°C* 800	-10°C 800	-15°C 800	-15°C* 800
Version	FIRST-SEASON			SMART			PREMIUM BE			INFINITE BE		
Power (kW)	-			2,5			2,5			2,5 + 2,5		
Unit outlet Temp. (°C)	17,5 17,2			17,5 16,8 19,0			26,9 26,6 22,3			30,4 26,9 26,2		







Those datas result from optimum regulation configuration considering outdoor temperatures.

Permanent unit supplied temperature, taking in account proportional bypass opening for exchanger defrost.

* 20% Airflow decrease on FRESH AIR SUPPLY (As standard function)

For your external cooling batteries (water or R410A), use our selection software **SOFTWAIR™** and get the right selection with its detailed report.

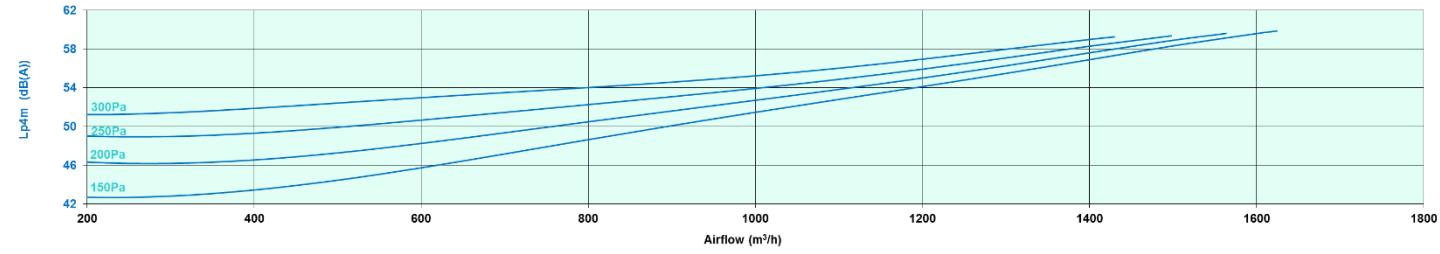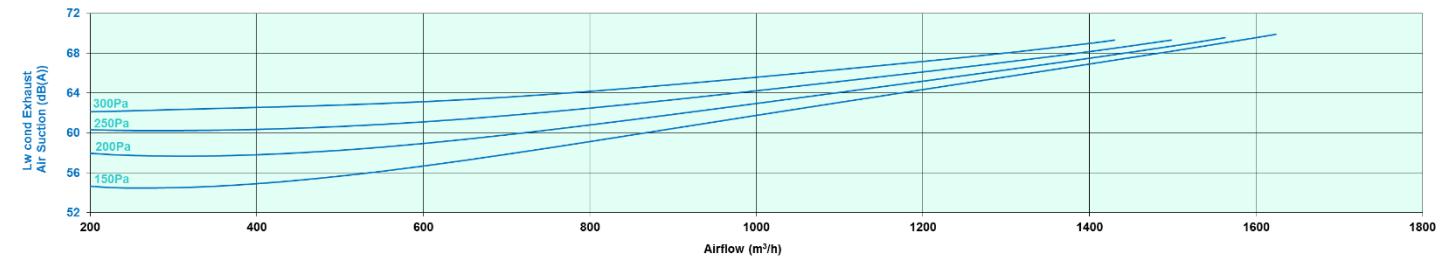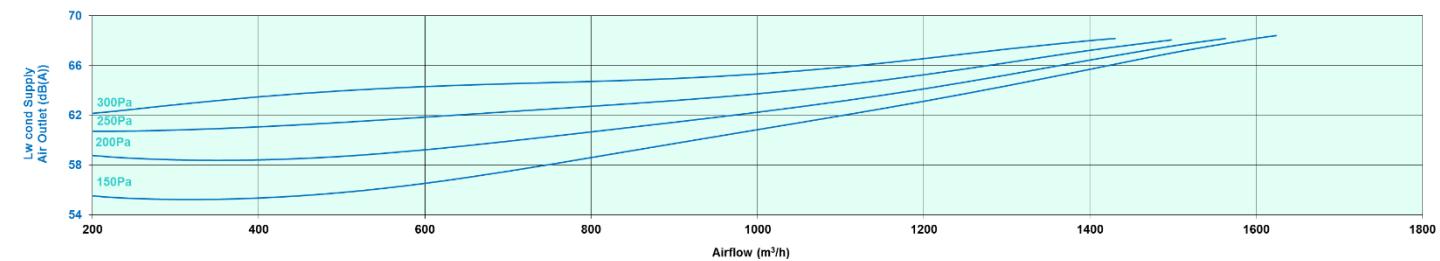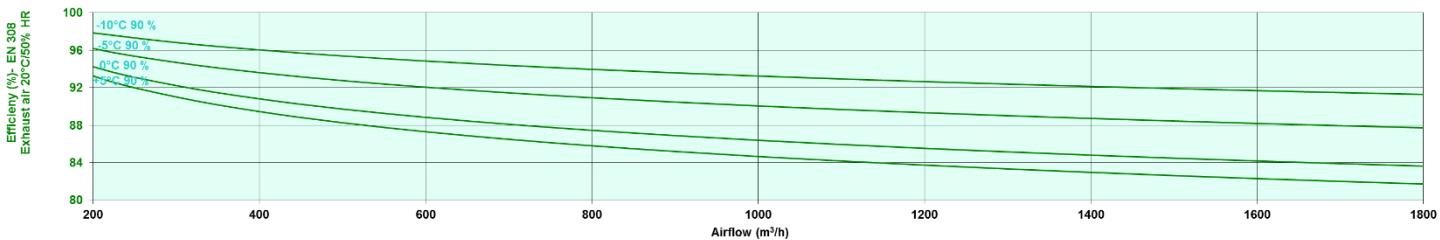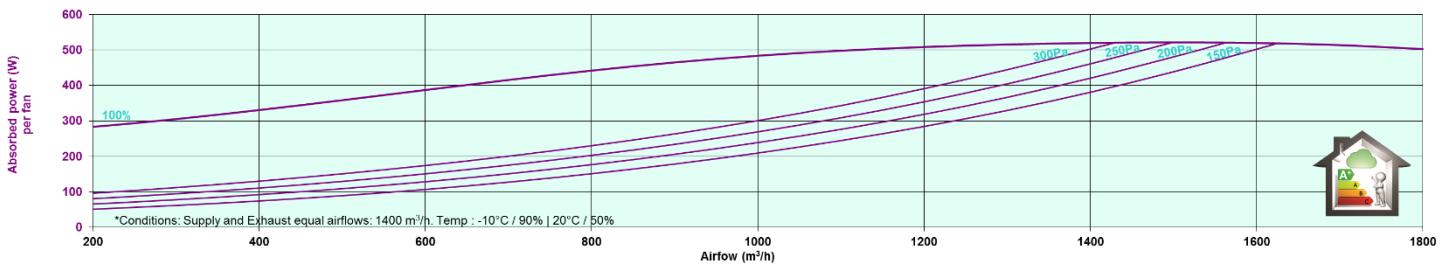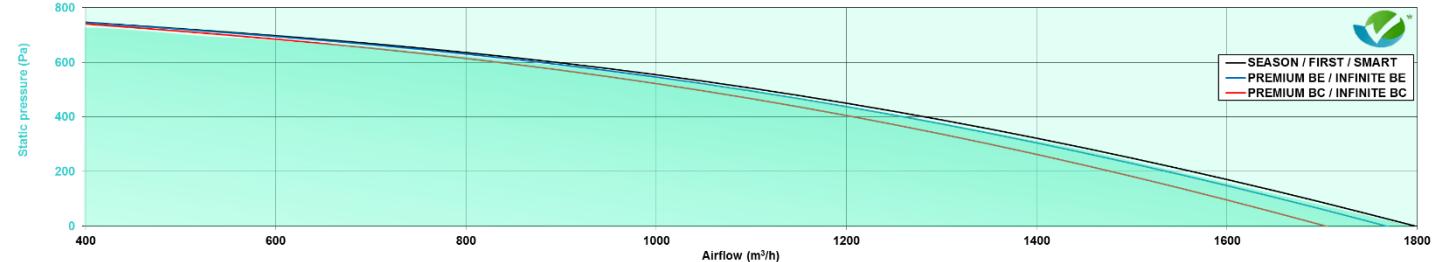

**SILVERTOP® 15**

COIL
PERFORMANCE **SILVERTOP™**

SILVERTOP® 15

Heating water coil battery - PREMIUM / INFINITE BC

Water Temp. [°C/°C]	Air inlet Temp. [°C]	Airflow [m³/h]	500	700	900	1100	1300	1500	1700
80 / 60	11	Power [kW]/Air outlet Temp. [°C]	6,4 / 48,6	8,0 / 44,6	9,4 / 41,7	10,7 / 39,4	11,8 / 37,5	12,8 / 36,0	13,7 / 34,6
		Water flow [l/h]/DP water [kPa]	281 / 1,9	352 / 2,9	413 / 3,9	467 / 4,9	516 / 5,8	561 / 6,8	601 / 7,7
	15	Power [kW]/Air outlet Temp. [°C]	6,0 / 49,9	7,5 / 46,2	8,8 / 43,5	9,9 / 41,3	10,9 / 39,6	11,9 / 38,1	12,7 / 36,9
		Water flow [l/h]/DP water [kPa]	261 / 1,7	327 / 2,5	384 / 3,4	434 / 4,2	479 / 5,1	520 / 5,9	558 / 6,7
60 / 50	11	Power [kW]/Air outlet Temp. [°C]	4,8 / 39,2	6,1 / 36,3	7,1 / 34,2	8,1 / 32,5	8,9 / 31,1	9,7 / 29,9	10,4 / 29,0
		Water flow [l/h]/DP water [kPa]	419 / 4,1	527 / 6,3	620 / 8,5	702 / 10,7	777 / 12,9	845 / 15,1	907 / 17,2
	15	Power [kW]/Air outlet Temp. [°C]	4,4 / 40,6	5,5 / 37,9	6,5 / 36,0	7,3 / 34,4	8,1 / 33,2	8,8 / 32,1	9,4 / 31,2
		Water flow [l/h]/DP water [kPa]	380 / 3,5	477 / 5,3	561 / 7,1	636 / 8,9	703 / 10,7	764 / 12,5	821 / 14,3
45 / 40	11	Power [kW]/Air outlet Temp. [°C]	3,5 / 31,2	4,4 / 29,2	5,1 / 27,7	5,8 / 26,5	6,5 / 25,5	7,0 / 24,7	7,6 / 24,0
		Water flow [l/h]/DP water [kPa]	599 / 8,3	755 / 12,7	889 / 17,2	1009 / 21,7	1118 / 26,2	1217 / 30,6	1308 / 35,0
	15	Power [kW]/Air outlet Temp. [°C]	3,0 / 32,6	3,8 / 30,8	4,5 / 29,5	5,1 / 28,5	5,6 / 27,6	6,1 / 26,9	6,6 / 26,3
		Water flow [l/h]/DP water [kPa]	521 / 6,4	656 / 9,8	773 / 13,3	876 / 16,7	970 / 20,2	1056 / 23,6	1134 / 26,9

Electrical battery - SMART / PREMIUM / INFINITE BE

Fresh Air Airflow (m³/h)	0°C 1500	-5°C 1500	-10°C 1500	-15°C 1500	-15°C* 1500	0°C 1500	-5°C 1500	-10°C 1500	-10°C* 1500	-10°C 1500	-15°C 1500	-15°C* 1500
Version	FIRST-SEASON			SMART			PREMIUM BE			INFINITE BE		
				Defrost battery			Heating battery			Heating + Defrost batteries		
Power (kW)	-			5,25			3,75			5,25 + 3,75		
Unit outlet Temp. (°C)	16,9 16,6			16,9 17,1 18,3			24,4 24,1 20,1			27,6 24,4 24,6		

Those datas result from optimum regulation configuration considering outdoor temperatures.

Permanent unit supplied temperature, taking in account proportional bypass opening for exchanger defrost.







* 20% Airflow decrease on FRESH AIR SUPPLY (As standard function)

For your external cooling batteries (water or R410A), use our selection software **SOFTWAIR™** and get the right selection with its detailed report.

ECONOLOGICAL SOLUTIONS®



SILVERTOP® 23

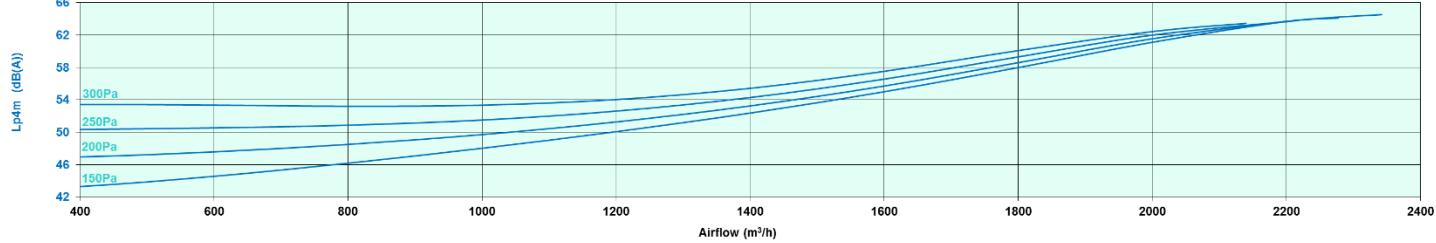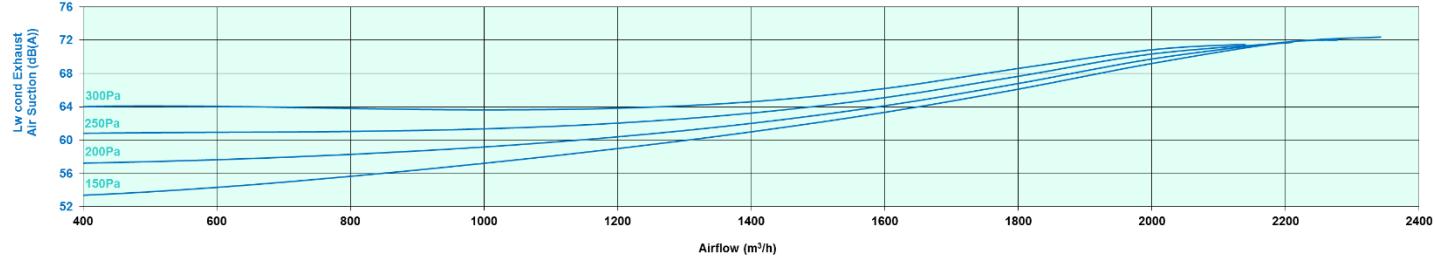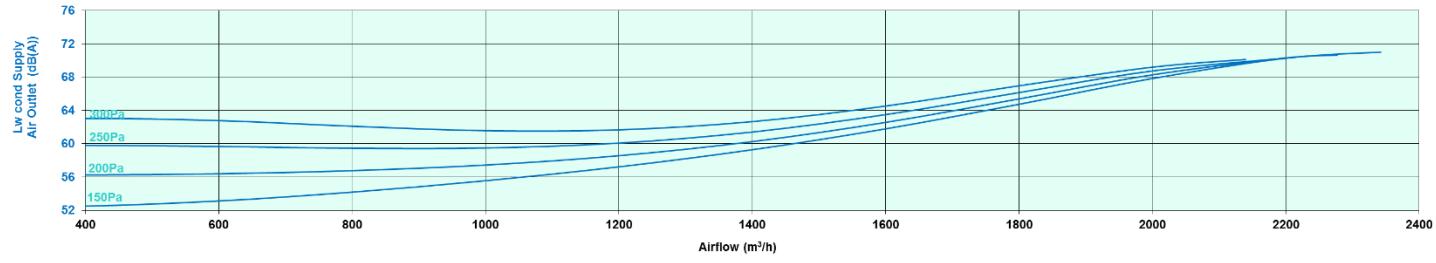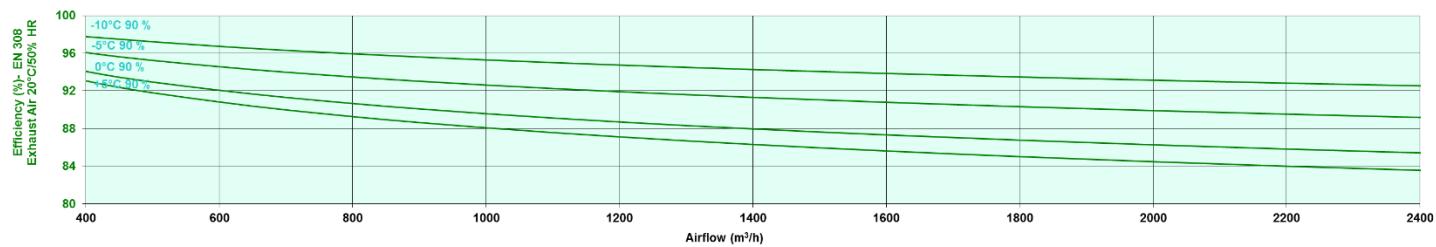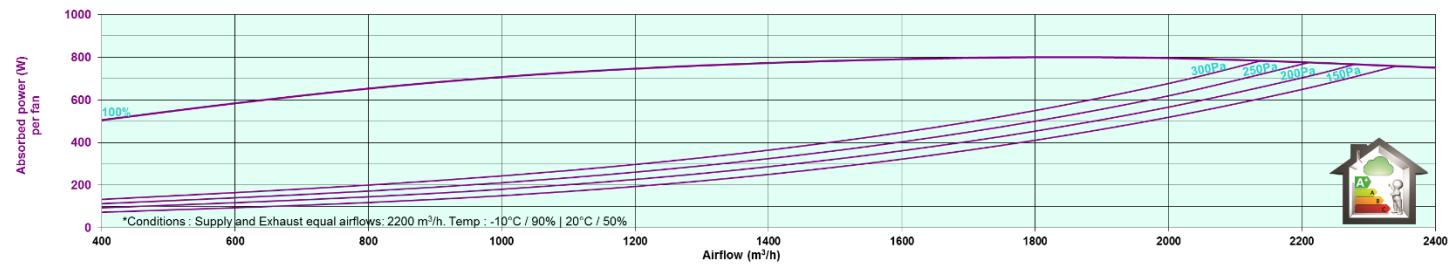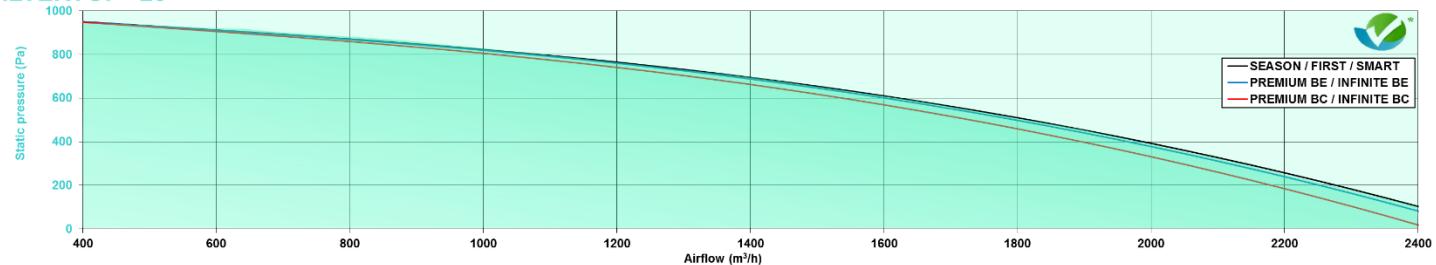

SILVERTOP® 23

Heating water coil battery - PREMIUM / INFINITE BC

Water Temp. [°C/°C]	Air inlet Temp. [°C]	Airflow [m³/h]	600	1000	1400	1800	2200	2600	3000
80 / 60	11	Power [kW]/Air outlet Temp. [°C]	8,1 / 50,5	11,4 / 44,5	14,1 / 40,5	16,4 / 37,7	18,4 / 35,5	20,2 / 33,8	21,8 / 32,3
		Water flow [l/h]/DP water [kPa]	355 / 1,9	501 / 3,7	620 / 5,5	720 / 7,2	808 / 9,0	887 / 10,6	957 / 12,3
	15	Power [kW]/Air outlet Temp. [°C]	7,5 / 51,7	10,6 / 46,1	13,1 / 42,4	15,3 / 39,8	17,1 / 37,8	18,8 / 36,1	20,3 / 34,8
		Water flow [l/h]/DP water [kPa]	330 / 1,7	466 / 3,2	575 / 4,8	669 / 6,3	750 / 7,8	823 / 9,3	888 / 10,7
60 / 50	11	Power [kW]/Air outlet Temp. [°C]	6,1 / 40,6	8,6 / 36,2	10,7 / 33,3	12,4 / 31,2	14,0 / 29,6	15,4 / 28,3	16,6 / 27,2
		Water flow [l/h]/DP water [kPa]	527 / 4,2	749 / 8,1	929 / 12,0	1083 / 16,0	1218 / 19,9	1338 / 23,8	1446 / 27,5
	15	Power [kW]/Air outlet Temp. [°C]	5,5 / 41,8	7,8 / 37,8	9,7 / 35,2	11,3 / 33,3	12,7 / 31,9	13,9 / 30,7	15,0 / 29,7
		Water flow [l/h]/DP water [kPa]	478 / 3,5	679 / 6,7	841 / 10,0	980 / 13,3	1102 / 16,5	1210 / 19,7	1308 / 22,8
45 / 40	11	Power [kW]/Air outlet Temp. [°C]	4,4 / 32,2	6,2 / 29,1	7,7 / 27,1	9,0 / 25,6	10,1 / 24,5	11,1 / 23,5	12,1 / 22,8
		Water flow [l/h]/DP water [kPa]	752 / 8,4	1072 / 16,3	1334 / 24,4	1557 / 32,6	1753 / 40,6	1928 / 48,5	2086 / 56,2
	15	Power [kW]/Air outlet Temp. [°C]	3,8 / 33,4	5,4 / 30,8	6,7 / 29,0	7,8 / 27,7	8,8 / 26,7	9,7 / 25,9	10,5 / 25,2
		Water flow [l/h]/DP water [kPa]	654 / 6,5	932 / 12,5	1158 / 18,8	1352 / 25,0	1521 / 31,2	1673 / 37,2	1809 / 43,1

Electrical battery - SMART / PREMIUM / INFINITE BE

Fresh Air	0°C	-5°C	-10°C	-15°C	-15°C*	0°C	-5°C	-10°C	-10°C*	-10°C	-15°C	-15°C*
Airflow (m³/h)	2300	2300	2300	2300	2300	2300	2300	2300	2300	2300	2300	2300
Version	FIRST-SEASON	SMART				PREMIUM BE				INFINITE BE		
		Defrost battery				Heating battery				Heating + Defrost batteries		
Power (kW)	-		6,75				6,75				6,75 + 6,75	
Unit outlet Temp. (°C)	17,1	16,9	17,1	16,1	18,6	25,9	25,7	21,5	29,4	25,9	24,9	29,6






Those datas result from optimum regulation configuration considering outdoor temperatures.

Permanent unit supplied temperature, taking in account proportional bypass opening for exchanger defrost.

* 20% Airflow decrease on FRESH AIR SUPPLY (As standard function)

For your external cooling batteries (water or R410A), use our selection software **SOFTWAIR™** and get the right selection with its detailed report.

AIR CONTROL SOLUTIONS®

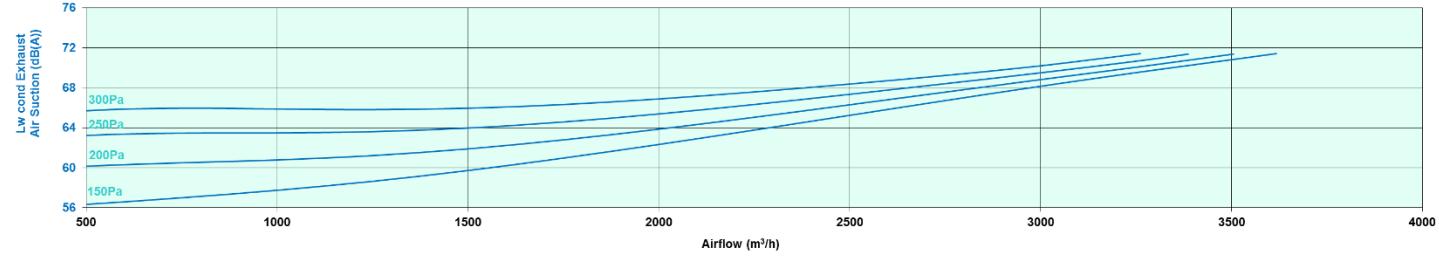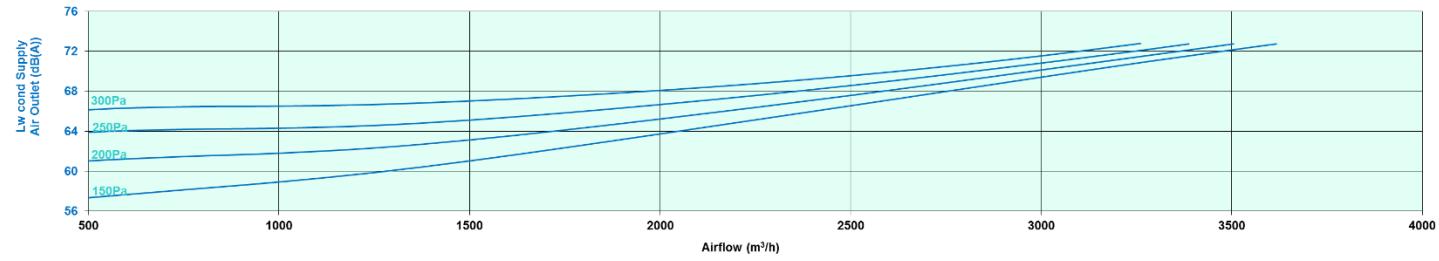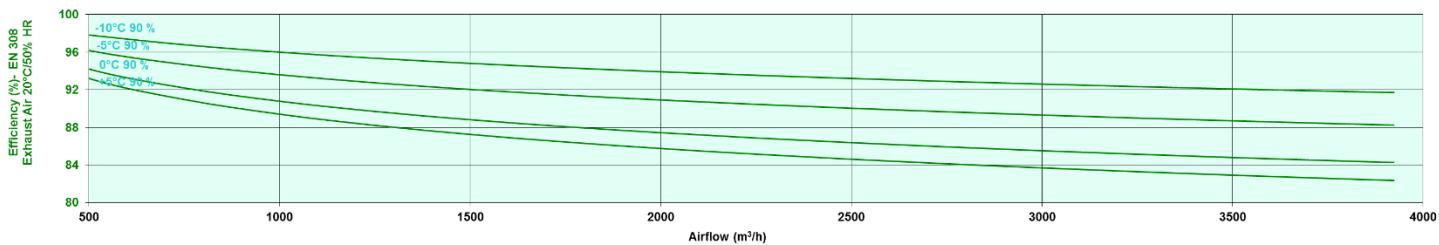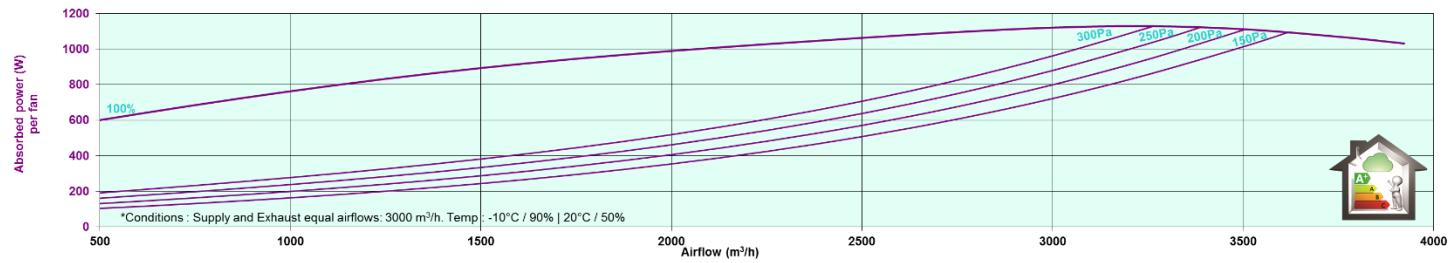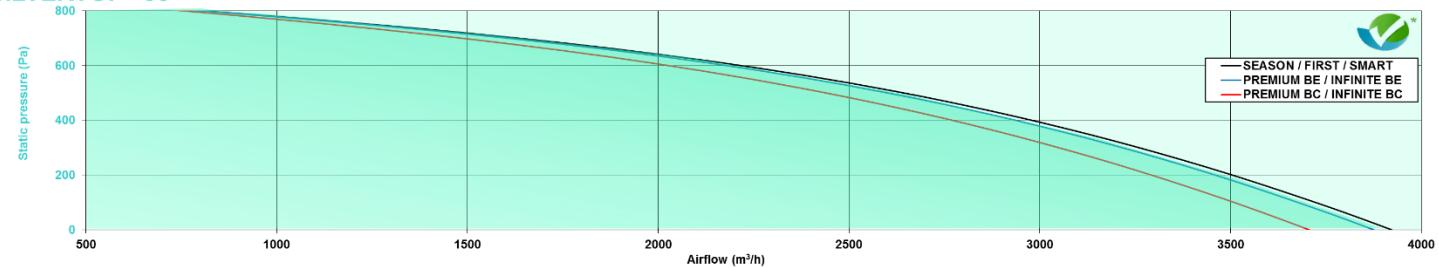**SILVERTOP® 35**

SILVERTOP® 35

Heating water coil battery - PREMIUM / INFINITE BC

Water Temp. [°C/C]	Air inlet Temp. [°C]	Airflow [m³/h]	1000	1400	1800	2200	2600	3000	3400
80 / 60	11	Power [kW]/Air outlet Temp. [°C]	12,7 / 48,3	15,9 / 44,3	18,7 / 41,4	21,1 / 39,1	23,3 / 37,2	25,3 / 35,7	27,1 / 34,3
		Water flow [l/h]/DP water [kPa]	558 / 2,5	683 / 3,7	819 / 5,0	925 / 6,2	1021 / 7,4	1108 / 8,6	1188 / 9,8
	15	Power [kW]/Air outlet Temp. [°C]	11,9 / 49,7	14,8 / 45,9	17,4 / 43,2	19,6 / 41,1	21,6 / 39,6	23,5 / 37,9	25,2 / 36,7
		Water flow [l/h]/DP water [kPa]	519 / 2,2	649 / 3,2	761 / 4,3	859 / 5,4	948 / 6,5	1029 / 7,5	1103 / 8,6
60 / 50	11	Power [kW]/Air outlet Temp. [°C]	9,6 / 38,9	12,0 / 36,0	14,1 / 33,9	15,9 / 32,2	17,6 / 30,8	19,2 / 29,7	20,6 / 28,7
		Water flow [l/h]/DP water [kPa]	830 / 5,3	1042 / 8,1	1225 / 10,9	1387 / 13,6	1533 / 16,4	1666 / 19,1	1788 / 21,8
	15	Power [kW]/Air outlet Temp. [°C]	8,7 / 40,3	10,9 / 37,7	12,8 / 35,7	14,4 / 34,2	16,0 / 33,0	17,3 / 31,9	18,6 / 31,0
		Water flow [l/h]/DP water [kPa]	753 / 4,5	945 / 6,7	1110 / 9,1	1256 / 11,4	1388 / 13,7	1508 / 15,9	1619 / 18,1
45 / 40	11	Power [kW]/Air outlet Temp. [°C]	6,9 / 31,0	8,6 / 29,0	10,2 / 27,5	11,5 / 26,3	12,7 / 25,3	13,8 / 24,5	14,9 / 23,8
		Water flow [l/h]/DP water [kPa]	1185 / 10,6	1491 / 16,2	1756 / 21,8	1991 / 27,5	2203 / 33,1	2396 / 38,7	2574 / 44,1
	15	Power [kW]/Air outlet Temp. [°C]	6,0 / 32,5	7,5 / 30,7	8,8 / 29,3	10,0 / 28,3	11,1 / 27,4	12,0 / 26,7	12,9 / 26,1
		Water flow [l/h]/DP water [kPa]	1032 / 8,2	1297 / 12,5	1527 / 16,9	1730 / 21,2	1914 / 25,6	2081 / 29,8	2235 / 34,0

Electrical battery - SMART / PREMIUM / INFINITE BE

Fresh Air Airflow (m³/h)	0°C 3500	-5°C 3500	-10°C 3500	-15°C 3500	-15°C* 3500	0°C 3500	-5°C 3500	-10°C 3500	-10°C* 3500	-10°C 3500	-15°C 3500	-15°C* 3500
Version	FIRST-SEASON			SMART			PREMIUM BE			INFINITE BE		
				Defrost battery			Heating battery			Heating + Defrost batteries		
Power (kW)	-			12			10,5			12 + 10,5		
Unit outlet Temp. (°C)	17,0 16,7			17,0 17,1 18,4			26,0 25,7 21,6			26,0 26,1 29,6		

Those datas result from optimum regulation configuration considering outdoor temperatures.

Permanent unit supplied temperature, taking in account proportional bypass opening for exchanger defrost.







* 20% Airflow decrease on FRESH AIR SUPPLY (As standard function)

For your external cooling batteries (water or R410A), use our selection software **SOFTWAIR™** and get the right selection with its detailed report.





SILVERTOP® 52

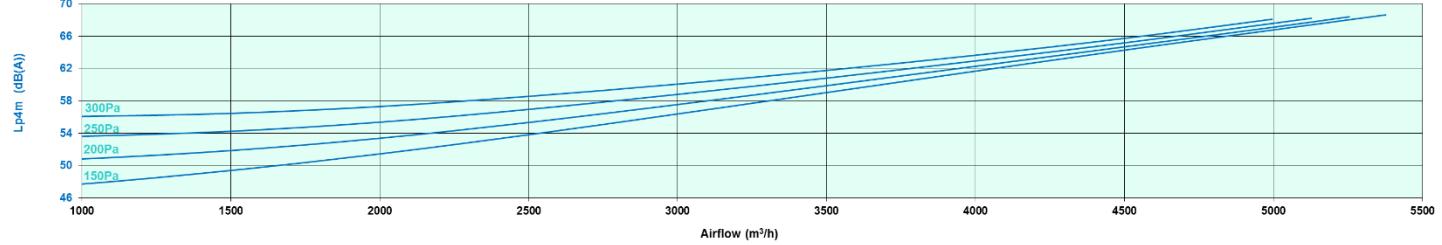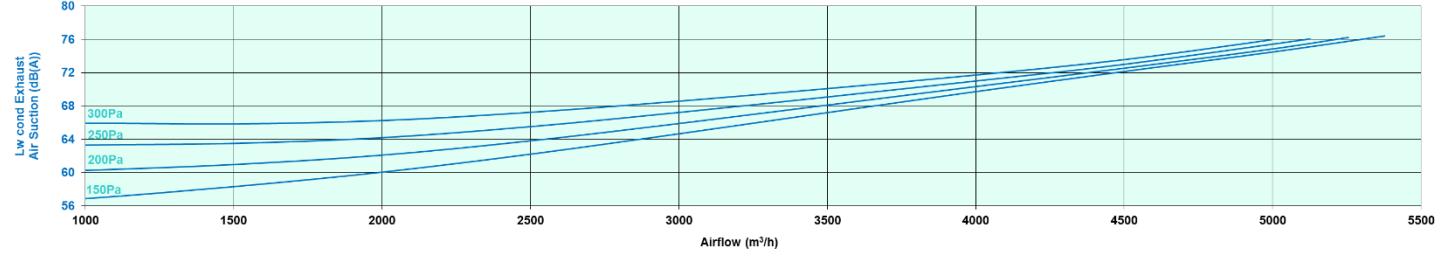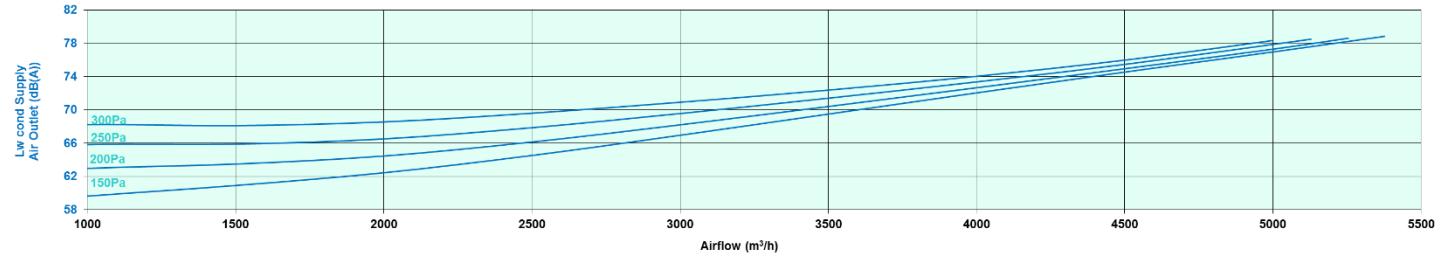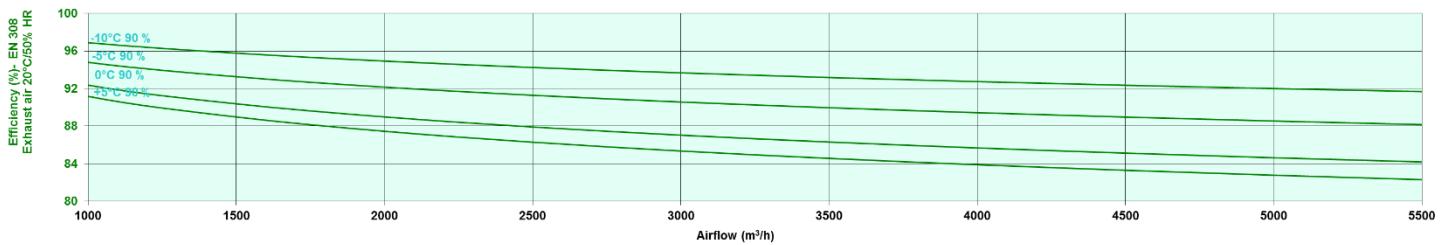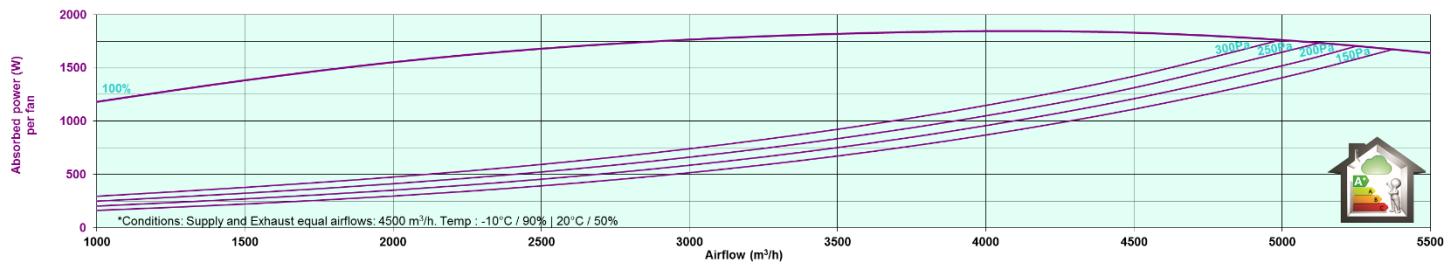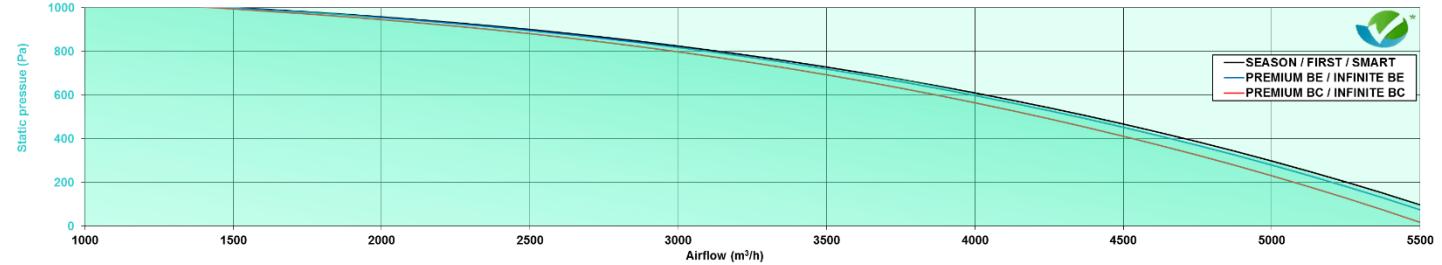

COIL
PERFORMANCE SILVERTOP™

2

SILVERTOP® 52

Heating water coil battery - PREMIUM / INFINITE BC

Water Temp. [°C/C]	Air inlet Temp. [°C]	Airflow [m³/h]	1200	2000	2800	3600	4400	5200
80 / 60	11	Power [kW]/Air outlet Temp. [°C]	17,1 / 52,7	24,4 / 46,7	30,3 / 42,7	35,4 / 39,8	39,9 / 37,5	43,9 / 35,7
		Water flow [l/h]/DP water [kPa]	749 / 1,3	1068 / 2,6	1329 / 3,8	1552 / 5,1	1749 / 6,4	1925 / 7,6
	15	Power [kW]/Air outlet Temp. [°C]	15,9 / 53,8	22,7 / 48,2	28,2 / 44,4	32,9 / 41,7	37,1 / 39,6	40,8 / 38,0
		Water flow [l/h]/DP water [kPa]	697 / 1,2	993 / 2,2	1235 / 3,4	1442 / 4,5	1624 / 5,5	1787 / 6,6
60 / 50	11	Power [kW]/Air outlet Temp. [°C]	12,8 / 42,1	18,3 / 37,8	22,8 / 34,9	26,8 / 32,8	30,2 / 31,1	33,3 / 29,7
		Water flow [l/h]/DP water [kPa]	1109 / 2,9	1592 / 5,6	1987 / 8,4	2327 / 11,2	2627 / 14,0	2896 / 16,8
	15	Power [kW]/Air outlet Temp. [°C]	11,6 / 43,2	16,6 / 39,3	20,7 / 36,6	24,2 / 34,7	27,4 / 33,2	30,1 / 32,0
		Water flow [l/h]/DP water [kPa]	1007 / 2,4	1443 / 4,7	1801 / 7,0	2108 / 9,3	2379 / 11,7	2622 / 14,0
45 / 40	11	Power [kW]/Air outlet Temp. [°C]	9,1 / 33,3	13,1 / 30,2	16,5 / 28,2	19,3 / 26,7	21,8 / 25,5	24,1 / 24,6
		Water flow [l/h]/DP water [kPa]	1579 / 5,7	2275 / 11,1	2847 / 16,9	3340 / 22,6	3775 / 28,3	4167 / 34,0
	15	Power [kW]/Air outlet Temp. [°C]	8,0 / 34,4	11,4 / 31,7	14,3 / 30,0	16,8 / 28,6	19,0 / 27,6	20,9 / 26,8
		Water flow [l/h]/DP water [kPa]	1376 / 4,4	1979 / 8,6	2475 / 13,0	2902 / 17,5	3279 / 21,9	3618 / 26,2

Electrical battery - SMART / PREMIUM / INFINITE BE

Fresh Air Airflow (m³/h)	0°C 5200	-5°C 5200	-10°C 5200	-15°C 5200	-15°C* 5200	0°C 5200	-5°C 5200	-10°C 5200	-10°C* 5200	-10°C 5200	-15°C 5200	-15°C* 5200
Version	FIRST-SEASON	SMART				PREMIUM BE				INFINITE BE		
		Defrost battery				Heating battery				Heating + Defrost batteries		
Power (kW)	-				15				12			
Unit outlet Temp. (°C)	16,9	16,6	16,9	15,7	18,4	23,8	23,5	19,5	26,9	23,8	22,7	27,1

Those datas result from optimum regulation configuration considering outdoor temperatures.

Permanent unit supplied temperature, taking in account proportional bypass opening for exchanger defrost.

* 20% Airflow decrease on FRESH AIR SUPPLY (As standard function)



For your external cooling batteries (water or R410A), use our selection software **SOFTWAIR™** and get the right selection with its detailed report.



* SECURITY AND CONTROL



PRESSURE SWITCH ref. DEP
Exhaust air filter (IP54)



MANOMETER WITH LIQUID ref. MANO



SMOKE DETECTOR ref. CDAD
(IP54) Cabinet



BOXE RELEASE ref BD
TBTS 24 ou 48Vcc - BOITIER (IP67)

* AIRFLOW MODULATION

REMOTE CONTROL ref. POT 230

Potentiometer only for SEASON version (IP54)



COMFORT REMONTE CONTROL ref. CDC2V2
OFF/LS/HS 2 fans - IP54 BOX



COMFORT REMONTE CONTROL ref. CDC PVGV2
LS/HS 2 fans - IP54 BOX



COMFORT REMONTE CONTROL ref. CDC1V2
ON/OFF 2 fans - IP54 BOX



PRESENCE DETECTOR ref. 360 TOR SA

ON/OFF or LS/HS (no compatible with SEASON version)



* CLIMATIC



**THERMOSTAT REVERSER SUMMER/WINTER ref
CHANGEOVER PAD**

For FIRST and SMART versions connected with an external COMBIBOX CONCEPT™ module



HUMIDITY SENSOR ref. HR 010 SG

0-10V signal (no compatible with SEASON version)



HUMIDITY SENSOR ref. HR 010 SA

0-10V signal (no compatible with SEASON version)



DESHUMIDIFYING MODULE ref. CBX --

To be duct mounted (cf. Air Treatment chapter for details). No compatible with SEASON version



CIRCULAR DAMPER ref. RC4A

Defrost security. Airtightness rate 3 (Ø200 à 500)



ELECTROVALVE KIT ref. KEI IP44

PREMIUM BC and INFINITE BC Versions

Indoor Installation

Type 15/1.6-3/8" M for SILVERTOP 06/08

Type 15/2.5-1/2" M for SILVERTOP 15/23

Type 15/4-1/2" F for SILVERTOP 35

Type 20/6.3-3/4" F for SILVERTOP 52

* REGULATION

**MONOFUNCTION AERA AIRFLOW MODULATOR ref.
SYSTEM TOP**



All Or Few area airflow modulator. To be associated to LOBBY™ (constant pressure). Airflow modulation versions.

**MONOFUNCTION AREA AIRFLOW MODULATOR ref.
SYSTEM DIVA**



Modulating area airflow modulator. To be associated to LOBBY™ (constant pressure). Airflow modulation versions

**MULTIFONCTIONS AREA AIRFLOW MODULATOR ref.
WONDERROOM**



To be associated to LOBBY™ (constant pressure). Airflow modulation versions. It handles area airflow modulation and communicates with the SILVERTOP™ unit. Example for free-cooling / night-cooling.

TOUCHSCREEN REMOTE CONTROL ref. EDTOUCH
SEASON version isn't compatible.



* INSTALLATION

FLEXIBLE SLEEVE ref. MTS M0

Fire rated: M0



Male Diameter (ducts side) / Female (unit side)